


Conditioned Water


Controls to fit Your needs!



FLECK Proflo-SE

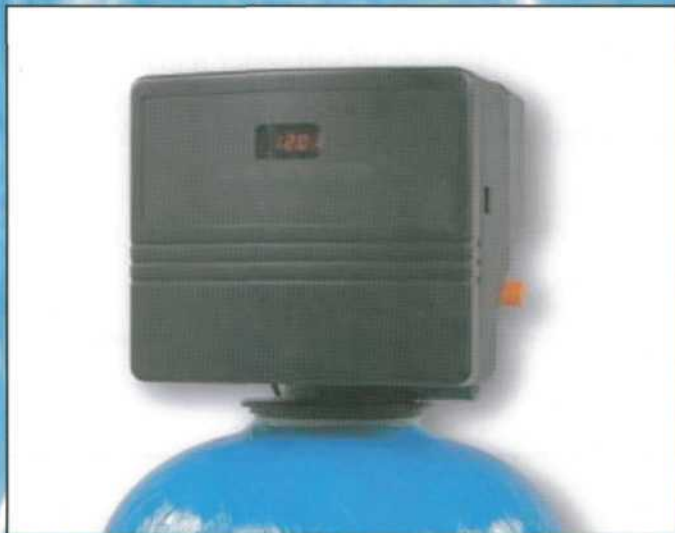

CLACK WS1

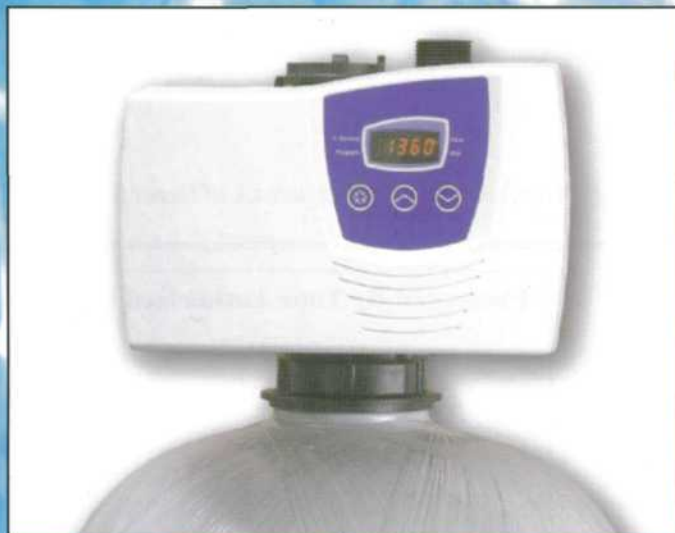

FLECK 7000-SE

In Your Kitchen

- **Dish Sparkler**
Eliminates streaks & spots.
- **Scrubbing Helper**
Eliminates film and soap scum.
- **Skin Softener**
Hard water makes skin dry and Rough.

Around Your Home

- **Hot Water Guard**
Adds life to water heaters by eliminating scale build up.
- **Pipe Protector**
Scale clogs plumbing and reduces water pressure.
- **Faucet Preserver**
Eliminates corrosion and lengthens service life and beauty.

In Your Pocket Book

- **Money Stretecher**
Save money on supplies and energy.
- **Soap Saver**
Use less soap and chemicals.
- **Clothes Saver**
Clothes last longer and stay brighter too.



Water Softeners 1"/ 1.25"/ 1.50"

Solid State Microprocessor Based Controls

□ Proflo SE

Product Features:

- Bright LED display • Displays time of day in hours and minutes • Volume of soft water remaining
- Easy, friendly programming • EEPROM memory • Strong, weather-resistant, Noryl® valve body
- 3/4", 1", 1-1/4" Inlet / Outlet • Versatile programming to fit application • Applications up to 16" dia. tanks

FlowRates (50psi Inlet) Valve Alone:

Continuous (15 psi drop)	21 GPM
Peak (25 psi drop)	27 GPM

□ WS - 1

Product Features:

- LCD display • Displays time of day in hours and minutes • Volume of soft water remaining
- EEPROM memory • Capacitor back-up • Strong, weather-resistant, Noryl® valve body
- Double backwash feature • Versatile programming to fit application • 3/4", 1", 1-1/4" Inlet / Outlet

FlowRates (50psi Inlet) Valve Alone:

Continuous (15 psi drop)	21 GPM
Peak (25 psi drop)	27 GPM

□ 7000 SE

Product Features:

- Bright LED display • Displays time of day in hours and minutes • Volume of soft water remaining
- Easy, friendly programming • EEPROM memory • Strong, weather-resistant, Noryl® valve body
- 1", 1-1/4", 1-1/2" Inlet / Outlet • Versatile programming to fit application
- Applications up to 24" dia. tanks

FlowRates (50psi Inlet) Valve Alone:

Continuous (15 psi drop)	35 GPM
Peak (25 psi drop)	46 GPM

**Noryl is a registered trademark of General Electric.

MODEL# _____

Specifications: _____

Capacity: _____

Dimensions: _____

Notes: _____

Presented By Your Authorized Dealer: